



# mastaTEX™ Filtafabric 1m x 50m

### **Product Images**



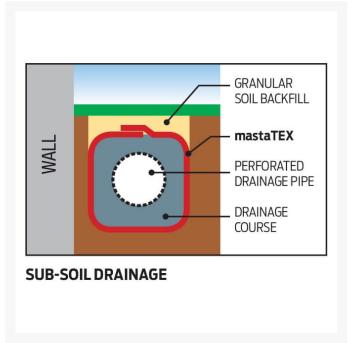



#### **Short Description**

mastaTEX™FiltaFabric FW grade 1m x 50m roll ideal for behind retaining walls, drainage, filtration, soil stockpile as temporary erosion control and subsoil filter.

#### Description

mastaTEX<sup>™</sup> FiltaFab is a high-quality staple fibre geotextile filter fabric, designed for landscaping and small civil works. Due to the 3 dimensional structure, it provides an effective drainage material both through the pores or within the fabric itself. mastaTEX<sup>™</sup> FiltaFab is most commonly used as a filtration layer in trenches, as a pipe and aggregate wrap or behind retaining walls.

#### **Applications:**

- Temporary erosion control
- Temporary drain silt protection
- Soil stockpiles
- Behind Retaining Walls
- Subsoil Filter
- Drainage
- Filtration

mastaTEX<sup>™</sup> FiltaFab is not approved to be used on road or railways due to the mechanical properties of a short fiber material.

INDEX PROPERTIES	TEST METHOD	UNITS	30-06GF	30-1GF	30-2GF-50	30-2GF	30-4GF
Material	-	-	UV Stabilised PP	UV Stabilised PP	UV Stabilised PP	UV Stabilised PP	UV Stabilised PP
Wide Strip Tensile Strength	JAS3706.2A	kN/m	6.5	6.5	6.5	6.5	6.5
Grab Tensile Strength	AS3706.2B	Ν	400	400	400	400	400
Pore Size	AS3706.7	mm	0.15	0.15	0.15	0.15	0.15
Nominal Flow Rate	AS3706.9	L/m²/s	>240	>240	>240	>240	>240
G Rating	Austroads	-	1500	1500	1500	1500	1500
DIMENSIONS							
Width	-	m	0.6	1	2	2	4
Length	-	m	50	50	50	100	100
Roll Diameter	-	mm	330	330	400	500	500

\*Specifications as per manufacturer.

## **Additional Information**

SKU	PF12-1-50
U.O.M	EA
Weight	250
Brand	GEOmasta
Range / Model	mastaTEX
Colour	White
Material	Geo-Textile
Length	50 m
Width	1 m

